




WX Series

ART00455



DIMENSIONS

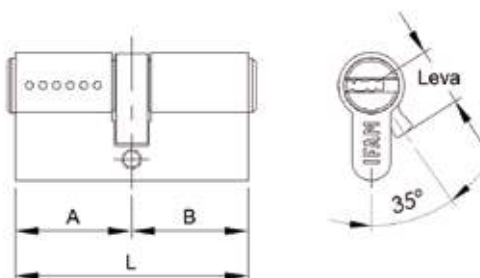

	L	A	B	Cam
WX3030N	60	30	30	15
WX3035N	65	30	35	15
WX3040N	70	30	40	15
WX3045N	75	30	45	15
WX3050N	80	30	50	15
WX3060N	90	30	60	15
WX3070N	100	30	70	15
WX3535N	70	35	35	15
WX3540N	75	35	40	15
WX3545N	80	35	45	15
WX4040N	80	40	40	15
WX4050N	90	40	50	15
WX4060N	100	40	60	15
WX4545N	90	45	45	15
WX5050N	100	50	50	15

FEATURES

- **European profile.**
- **Body:**
 - Made of extruded brass.
 - Matt-nickel finish.
- **Internal components:**
 - 16 steel pins arranged on three axes.
 - Pick proof pins.
 - Drill resistant cotters on the body and rotor.
- **Cam:**
 - Available in standard DIN cam (15mm.).
- **Opening / closure:**
 - Dual clutch system, which allows opening the door even if a key is blocking the opposite end of the cylinder.
- **Keys:**
 - Key profile design patented by IFAM (no. 2.061.242).
 - Security dimple key with millions of differs.
 - Supplied with 4 keys.
- **Packaging:**
 - Boxed (individual and group box).

CONTINUED ON NEXT PAGE



COMING FROM PREVIOUS PAGE



SERVICES

- Master keying service
- Keying alike service
- Ceratin key number service

UNIQUE USAGE CODE

Along with the WX cylinder, IFAM delivers an ownership card that includes the key copy code.

Each time the user requests new copies, IFAM renews the code on the ownership card. A new code is generated through IFAM's software Control Code System. The old codes will be blocked and stored in the customers history file.

In order to guarantee the maximum confidentiality, the new code printed on the card will be masked in a hidden area and will remain invisible until the user scratches the area to reveal the code.

