


# CS200

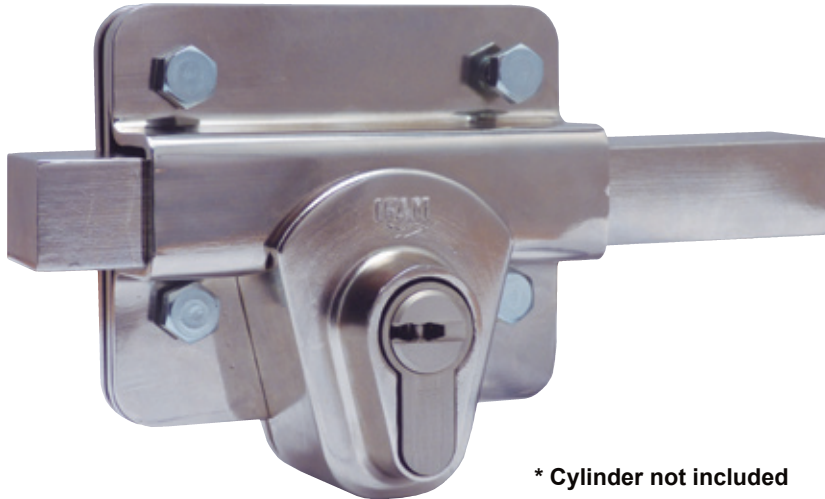

\* Cylinder not included

## FEATURES

- Body:** – Made of steel.
- Lever:** – Square, made of steel.  
– Thickness: 19mm.
- Opening / locking:** – Suitable for any Euro profile cylinder with standard DIN cam (15mm). (Cylinder not included).  
– The cylinder cam activates the rim lock's lever directly and doesn't need to be replaced with a crown cam.  
– If you want to know the length of the cylinder you need to install on your CS200 rim lock, and make the following sum: 30mm (one of the cylinders ends has to be 30mm long) +10mm + your door's thickness expressed in millimetres.
- Other features:** – Compatible with escutcheons with a distance between axes of 26 or 38mm, like those in the IFAM range.
- Finishes:** – Brass and nickel, highly resistant to wear and corrosion.
- Packaging:** – Box packed.

## DIMENSIONS

